





MULTI-BRACE

- Commercial and Industrial Roof/Wall Bracing
- Economically comparable to Steel Rod or Timber Bracing systems
- Quick and easy to install


**USE STAINLESS STEEL
OPTION IN EXTERIOR
SITUATIONS**

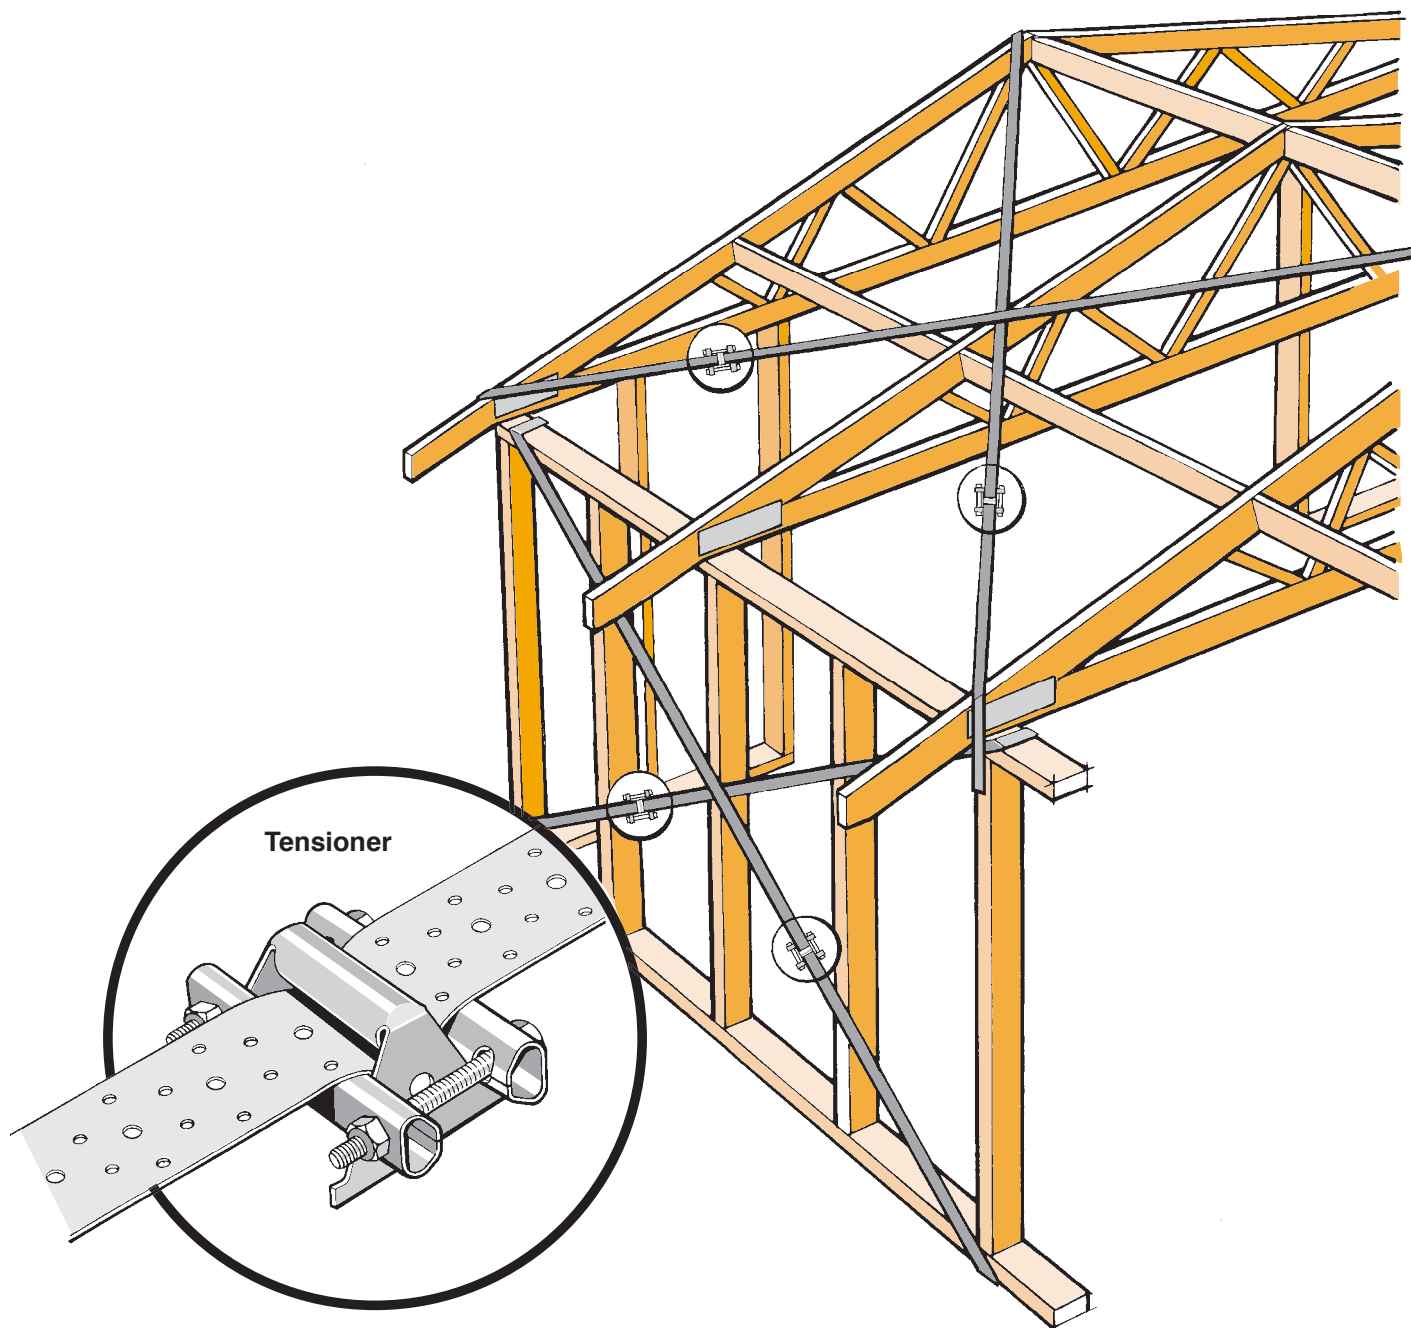

**Available from leading Builders Supply Merchants
throughout New Zealand**

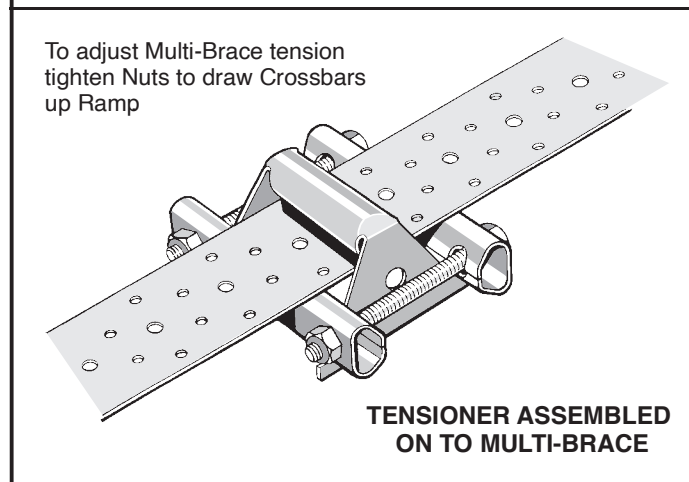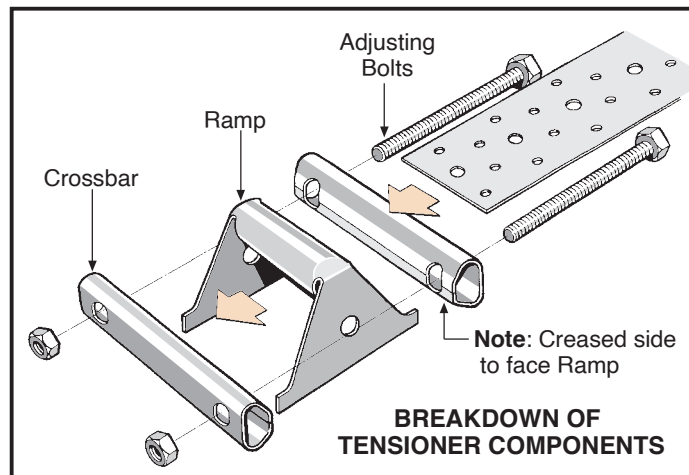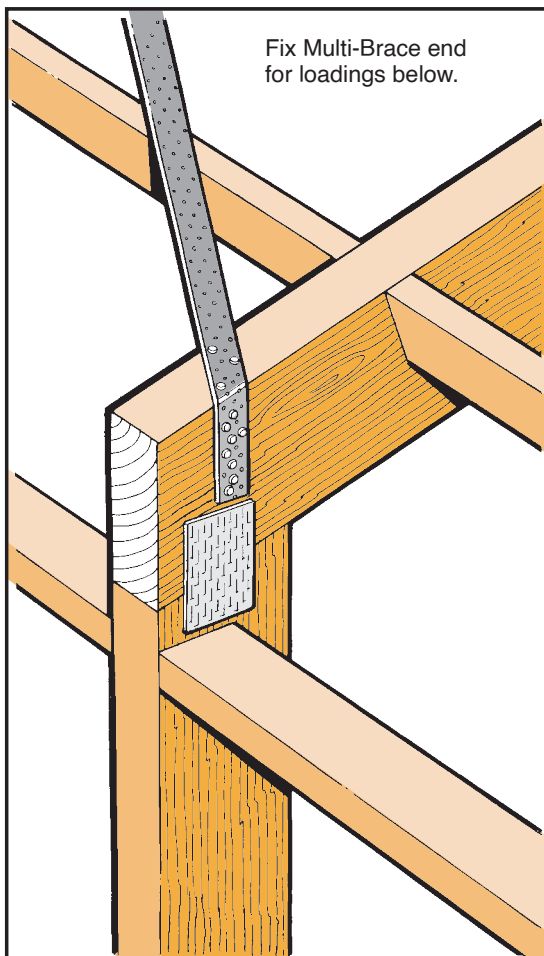

Loadings

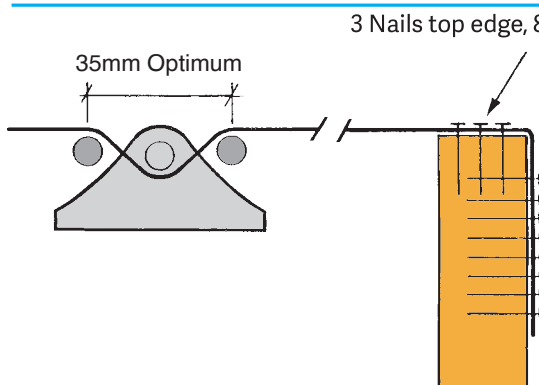

0.91mm x 53mm G300 Z275 GALVANISED STEEL
0.9mm x 53mm STAINLESS STEEL 304-2B

Tension	Multi-Brace Only	Multi-Brace With Tensioner*
Characteristic Load	14.8kN	14.8kN
Elongation 0.2mm/m/kN including nail slip		
End nail fixing - 11 x LUMBERLOK Product Nails 30mm x 3.15 dia. if Multi-Brace is folded over timber face. Otherwise use 15 Product Nails.		

Tensioner

Use tensioner to ensure Multi-Brace is taut prior to roof fixing.

*Note: Not available in Stainless Steel so tension must be provided during installation phase.

Availability

Multi-Brace is available in 10m, 15m and 30m coil lengths which may be ordered through your local LUMBERLOK merchant.