


NAILON PLATES

USE STAINLESS STEEL OPTION IN EXTERIOR SITUATIONS




Available from leading Builders Supply Merchants throughout New Zealand

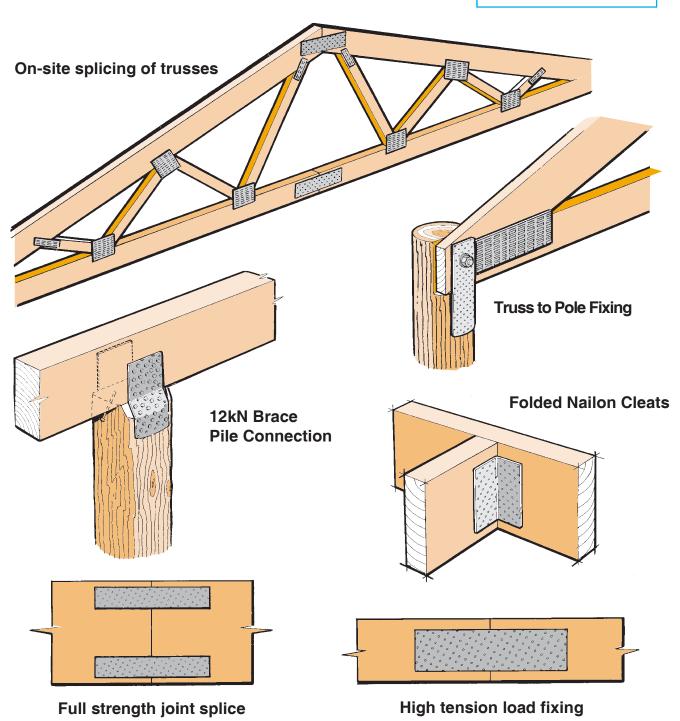

Nailon Plate Dimensions

Nailon is manufactured from steel coil and is available in 1mm, 2mm and 3mm nominal thicknesses of widths shown. LUMBERLOK Nailon is a very versatile steel plate with many applications in timber construction, providing a very strong jointing system. Nailon is easily applied by filling the pre-punched holes with LUMBERLOK Product Nails 30mm x 3.15mm dia. or Type 17 Hex Head Screws. Flat Nailon Plate can be used for splicing trusses and beams, or as a moment joint when a pair of plates are used. 3mm Nailon can also be welded to form special brackets supporting portal frames, trusses, etc.

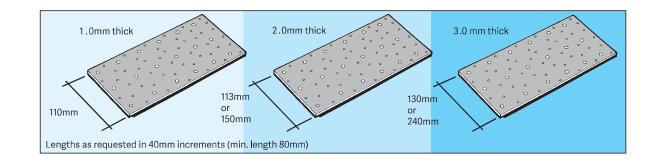

Specification

1.0mm x 110mm - 0.91mm G300 Z275 Galvanised Steel
2.0mm x 113mm or 150mm - 1.55mm G300 Z275 Galvanised Steel
3.0mm x 130mm or 240mm - Black Steel NZCC-SD ungalvanised
1.0mm and 2.0mm Nailon is zinc coated prior to punching
3.0mm Nailon is generally supplied ungalvanised, however all Nailon is available hot dipped galvanised on request
Nailon is available in 0.9mm x 110mm Stainless Steel 304-28.

Nails and Screws

1.0mm x 110mm and 2.0mm x 113mm Nailon, 8 nails or 3 screws per 40mm length 2.0mm x 150mm Nailon, 11 nails or 4 screws per 40mm length 3.0mm x 130mm Nailon, 10 nails or 3 screws per 40mm length 3.0mm x 240mm Nailon, 19 nails or 5 screws per 40mm length

NOTE:

1.0mm and 2.0mm galvanised Nailon - use Type 17-14g Hex Head Screws 3.0mm galvansied and 1.0mm stainless steel Nailon - use Type 17-12g Hex Head Screws **Stainless Steel Nails and Screws are also available.**

Availability

As many Nailon products are not stock items, a lead time is sometimes required when ordering. Flat Nailon Plate can be cut to any length, in multiples of 40mm. All folded and special Nailon products are made to order. Order your Nailon requirements through your local LUMBERLOK merchant. Orders directed to us will be charged via your local merchant.

Order to Specify

1. LUMBERLOK Nailon Plate - thickness, width and length in 40mm increments (min. 80mm, max. 2.4m length)

- 2. Special requirements, preferably accompanied by a sketch
- 3. Quantity
- 4. Nail and screw quantity required

Note: Made to order items are non-returnable.

